


PIRANHA™



RESTRAINT GASKET



- 350 PSI.
- SIMPLE INSTALLATION.
- MADE IN THE U.S.A.

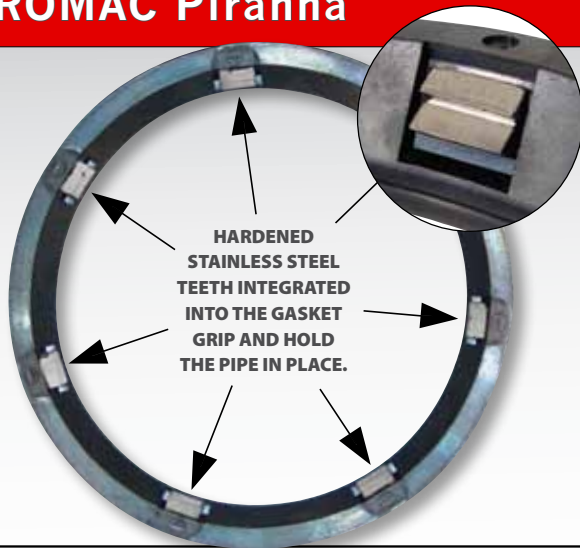

- **DUAL FUNCTION GASKET.**
Simultaneously seals and restrains.
- **SIMPLE INSTALLATION.**
No threaded fasteners to torque.
- **MADE IN THE U.S.A.**
The Piranha Restraint Gasket is manufactured in the U.S.A.



MATERIAL SPECIFICATIONS

RUBBER

4 - 10 inch: Styrene Butadiene Rubber (SBR) in accordance with ASTM D2000 MBA 710. NSF61 Certified.


12 inch: Nitrile Butadiene Rubber (NBR), dual durometer 60/80 per ASTM D2000. NSF61 Certified.

14 - 24 inch: Dual durometer SBR per ASTM D 2000 MBA 610Z and MBA 810, compounded for water and sewer service. Meets ANSI/AWWA C111/A21.11-00. For other compounds, contact Romac Industries, Inc.

TEETH Hardened stainless steel vulcanized into the rubber.

USE For use only on "Tyton" Ductile Iron Bell & Spigot Push-On Joints. Not for use on PVC pipe.

WORKING PRESSURE Up to 350 PSI (not to exceed pipe rating).

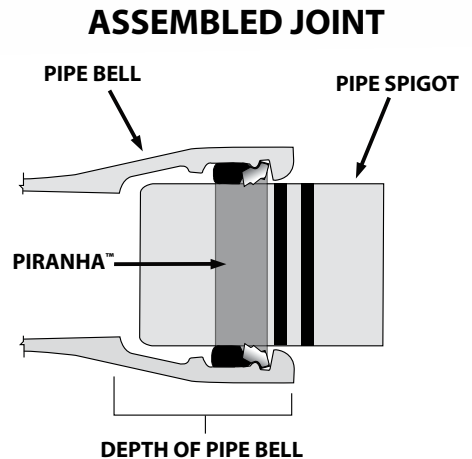

NOM. PIPE SIZE	CATALOG NUMBER	PIPE OD	DEPTH OF BELL	MAX JOINT DEFLECTION (degrees)	WEIGHT (lbs.)
4"	PIRANHA - 0480	4.80	3.15	5	0.4 #
6"	PIRANHA - 0690	6.90	3.38	5	0.6 #
8"	PIRANHA - 0905	9.05	3.69	5	1.0 #
10"	PIRANHA - 1110	11.10	3.75	5	1.4 #
12"	PIRANHA - 1320	13.20	3.75	5	1.7 #
14"	PIRANHA - 1530	15.30	5.00	4	3.9 #
16"	PIRANHA - 1740	17.40	5.00	4	4.4 #
18"	PIRANHA - 1950	19.50	5.00	4	5.1 #
20"	PIRANHA - 2160	21.60	5.50	2.5	5.7 #
24"	PIRANHA - 2580	25.80	5.95	2.5	6.4 #

ROMAC Piranha is not recommended for above ground use.

Information contained in this document is subject to change. Contact Romac Industries for any updates.

"TYTON® and TYTON JOINT®" are registered trademarks of the United States Pipe and Foundry, LLC which has no affiliation with Romac Industries, Inc. United States Pipe and Foundry Company, LLC does not manufacture, or endorse the Piranha Gasket.